


Whisper Wall Sound Barriers, TH-2P

➤ Reach compliance with the minimum mitigation required.

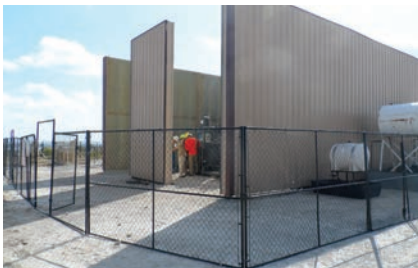

Industry Standard Permanent Wall System:

- Walls constructed with R-panel exterior with trim, acoustic absorption medium and perforated interior cladding
- Standard design based on 9' 5" centers for I-beams with minimal pier foundation for bracing based on wall dimensions
- Installation height based on 4' increments
- Man doors/emergency exit doors available upon request or for safety egress recommendations
- Specialty doors require standard concrete pier foundation and available upon request
- Available for rapid installation after final approval, typically within 1 week based on dimensions of the wall (less than 1,500 sq. ft.)
- Competitively priced
- STC Value = 28 NRC = 0.95
- Noise attenuation (dB loss expectations) = 10dB
- Standard Color is TAN
- Wall color full customizable upon request